Model HFC-1000

High Flow (1.5 gpm)

"This system was evaluated to a test capacity of 1000 gallons, 200% of the rated capacity of 500 gallons, to allow for a considerable safety margin"

Chemical Reduction System for your home, office and business

5 Stage Exclusive High Flow Design

Stage 1: Built-in 5.0 Micron Pre-Filter -Wrapped completely around the carbon block to filter dirt, sediment, filterable iron etc for increased cartridge life

Stage 2: Fine Filtration- Thick Compression molded powdered activated carbon block - Class 1 certified for removal of particles 0.5 Micron (1/50,000 of an inch) and larger


Stage 3: Adsorption- Specially formulated High Capacity carbon with over **1,000,000 square meters** of adsorption surface area

Stage 4: Filter Protection - Silver Zeolite technology blended throughout the filter for efficacy & longevity

agion®

Stage 5: Scale Control*- Polyphosphate spheres are slowly released to provide **protection against hard water scale** build up in water using appliances.

Replacement cartridge PN# RC-HFC-1000

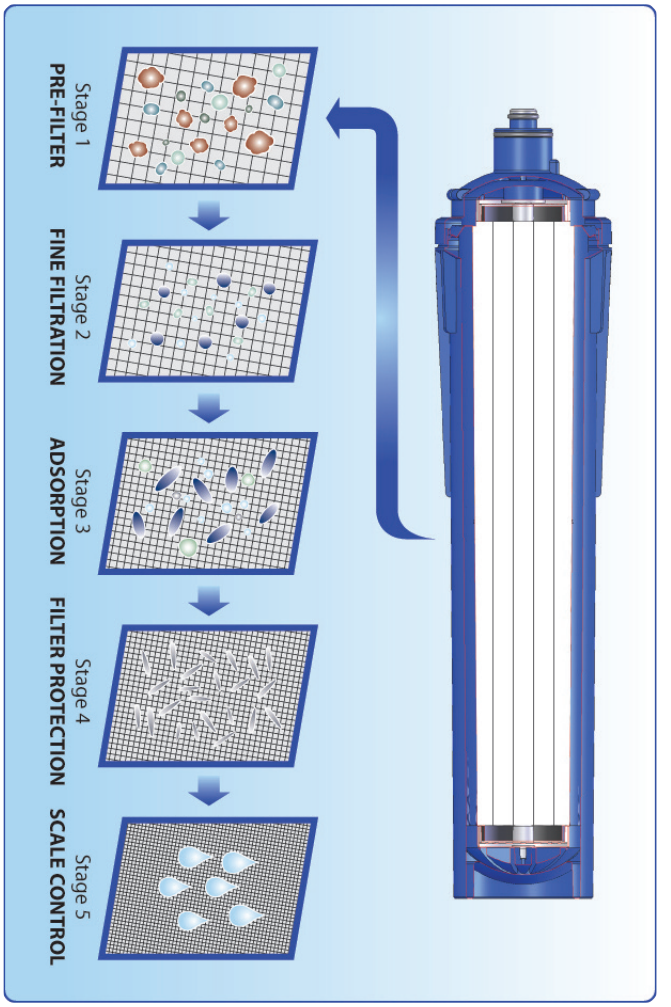

Certified Performance

for conditions of use, health claims certified by California Department of Public Health, and replacement parts, see the performance data sheet

.* claim not certified by WQA

California Department of Public Health

Certification Number 08-1926

C USA



Exclusive Patented Quick Change Cartridge

- Inlet & outlet ports sealed w/Dual O-ring technology
- Sanitary Sealed quick change cartridge 1/4 turn, no tools required

Made in the USA

Complete Installation Kit

- Undersink to existing cold sink faucet (all quick connections)

Lead Free Design

- Virgin polypropylene materials and tubing - no lead

©2015Waterline Technology®
Protected under patents 6,695,891, 6,926,826, 6,977,006, 7,172,693, 7,476,314 and other Patents Pending. Manufactured at EPA establishment Number 070932-ID-001

Model HFC-1000

High Flow (1.5 gpm)

Chemical Reduction System for your home, office and business

Certified Performance

This system certified to CSA B483.1 and NSF/ANSI 42 and 53 for specific performance claims as verified and substantiated by test data :

Standard 42: Aesthetic Effects
Chemical Unit
Taste and Odor Reduction and Aesthetic Chlorine Reduction
Mechanical Filtration Unit
Particulate Reduction Class 1 reduction of particles 0.5 micron and larger in size

Standard 53: Health Effects
Chemical Reduction Unit
MTBE Reduction
VOC Reduction
TTHM Reduction `
Lead Reduction

Mechanical Filtration Unit
Turbidity Reduction
Cyst Reduction

C USA


Certified by the Water Quality Association to WQA/ASPE/ANSI S-803 for sustainability

Operating Specifications
Min/Max working pressure: 30 psi (2.1 bar)/125 psi (8.6 bar), non shock
Temperature: 35-100° F (2-38° C)
Service flow rate 1.5 gpm (5.7 Lpm)
Rated Service Capacity: 500 gallons (1800 L)

Product performance is dependent upon incoming water conditions. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.


Conforms to NSF/ANSI 53 for MTBE, VOC , TTHM, & Lead reductions. See performance data sheet for individual contaminant's and reduction performance. Certified by the Water Quallity Association to WQA/ASPE/ANSI S-803 for Sustainability

The contaminant's or other substances reduced by this water filter device are not necessarily in your water.

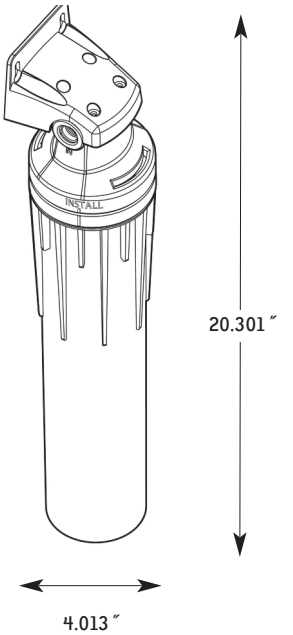


Typical Installation Options:

Existing Cold Faucet Installation with Existing Cold Sink Faucet Filtered

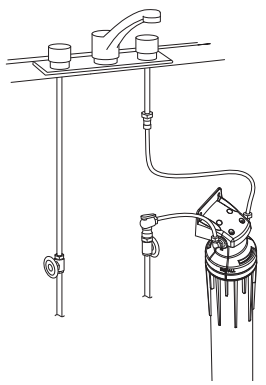

Under sink Separate Faucet Installation; Existing Cold Sink Faucet Non-Filtered

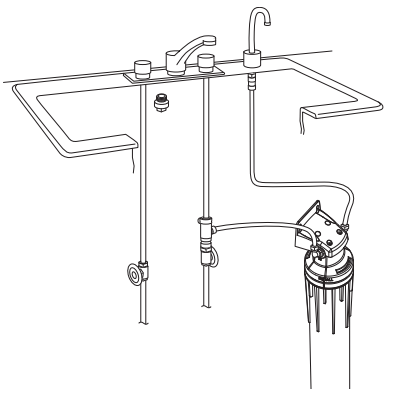

Warranty:
12 months from date of purchase or
24 months from date of manufacture.
See warranty sheet for details

This system is a great addition to any home, office or business. Its flow rate is 3 x the competition without scarifying performance. The capacity for the average family of 4-6 is a 1 Year Supply of drinking water.

Ideal system for homes that do not want to add a separate dispensing faucet and those with high flow kitchen faucets. For homes with pot filler faucets, or higher flow kitchen faucets use our Model HFC-1000Dual 3.0 gpm system!

Connecting to the existing cold sink faucet saves cost of purchasing a separate dispensing tap, installation time & design issues without the need to drill holes in your countertop. The high flow will allow use of this system for all drinking, cooking, food preparation. *Over 80% of the Cold water used at the kitchen sink should be filtered, now its automatic!*

High Flow + High Performance = Convenience plus a healthier lifestyle!

PARGREEN WATER TECHNOLOGIES

1206 W. CAPITOL DR. ADDISON, IL. 60101
PH: 630-628-1330 / FX 630-628-3050
SALES@PARGREEN.COM